


AQUADOM

CABINET & MIRROR


INSTALLATION GUIDE






AQUADOM Cabinet Installation Guide

WIRING

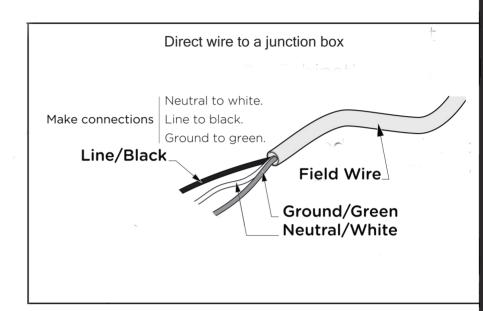

* AQUADOM Medicine Cabinet as seen from the back*



The wire is located at the top right corner of the cabinet if viewed from the back

Electric wiring: Be sure to provide enough wire to make the proper and safe connection to the Field/Power.



AQUADOM Cabinet Installation Guide

ASSEMBLY TOOLS



















PARTS




Single Door



Double Door



Triple Door

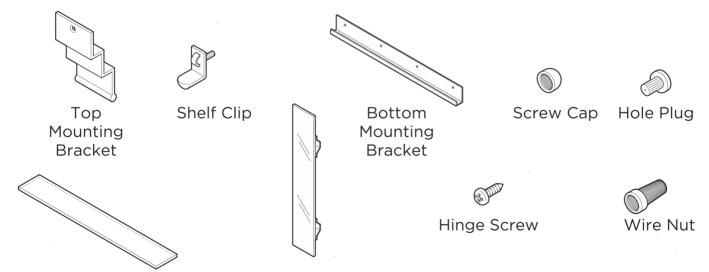


Glass Shelf

Glass Side Panel



AQUADOM Cabinet Installation Guide

DIMENSIONS

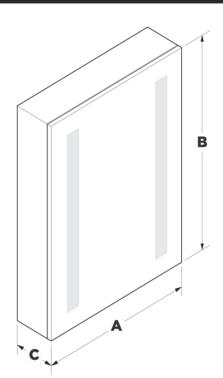


- A Cabinet's width
- **B** Cabinet's Height
- C Cabinet's Depth

NOTE: Determine overall medicine cabinet dimensions. If recessing medicine cabinet, determine rough-in dimensions.


Dimensions (inches)	Rough In Dimensions (inches)
20 x 26	19.5 x 25.5
24 x 30	23.5 x 29.5
30 x 30	29.5 x 29.5
36 x 30	35.5 x 29.5
48 x 30	47.5 x 29.5
60 x 30	59.5 x 29.5
24 x 40	23.5 x 39.5
30 x 40	29.5 x 39.5
36 x 40	35.5 x 39.5
48 x 40	47.5 x 39.5

PRE-INSTALLATION


1 Remove Door/s Prior mounting your cabinet. Start with unpluging the door from the cabinet.

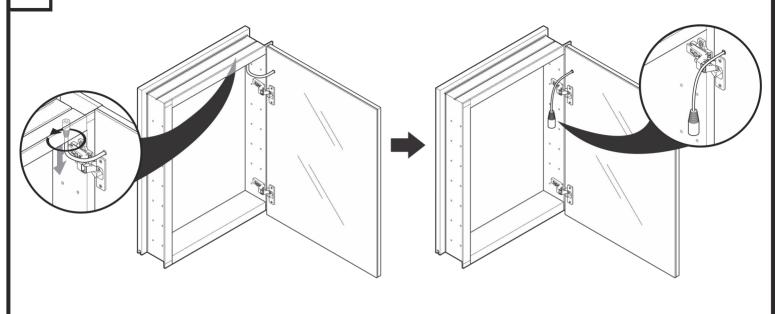


While supporting the door release the lever under the hinge arm Slide the door off the frame.

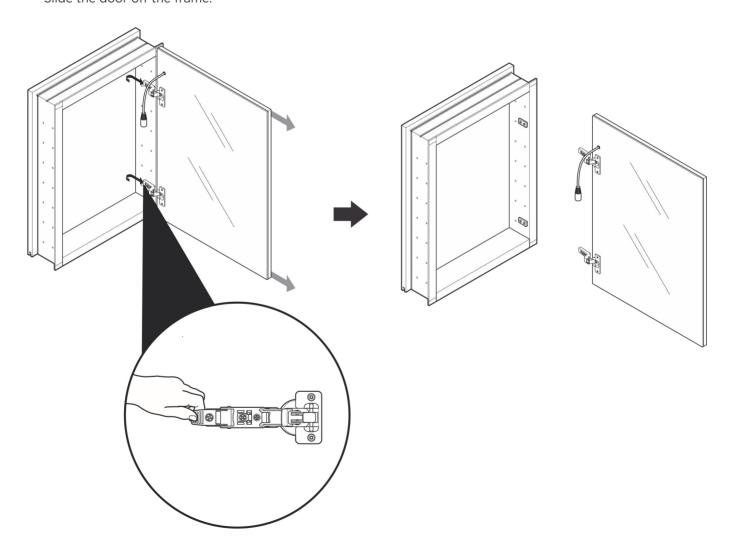


RECESS-MOUNT INSTALLATION



Draw the perimeter of the medicine cabinet on the wall.




Cut the marked perimeter with appropriate tool.



Frame the cutout opening.


(See Illustration below)



Place and hold the medicine cabinet in the cutout opening.


5

Level, then secure the medicine cabinet with the screws through the mounting holes into the framing studs.




Choose the position for your shelves, then push and twist the snap-in pins into place.

4 STEPS TO FRAME THE CUTOUT OPENING

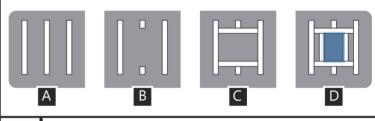

7 GLASS SHELF INSTALLATION



Push a side of the glass shelf into the left or the right pins.


Snap the glass shelf into the opposite side.


OPTIONAL DOOR ADJUSTMENT


Doors may need to be adjusted after the initial shipping of the cabinet. The cabinet doors have a three-way adjustment feature.

Height, side-to-side, level and depth can be adjusted. With the hinge slightly closed you can access the middle screw for up/down adjustment.


With the hinge fully extended you can access the front and back screws. These screws will move the door side to side and in and out.





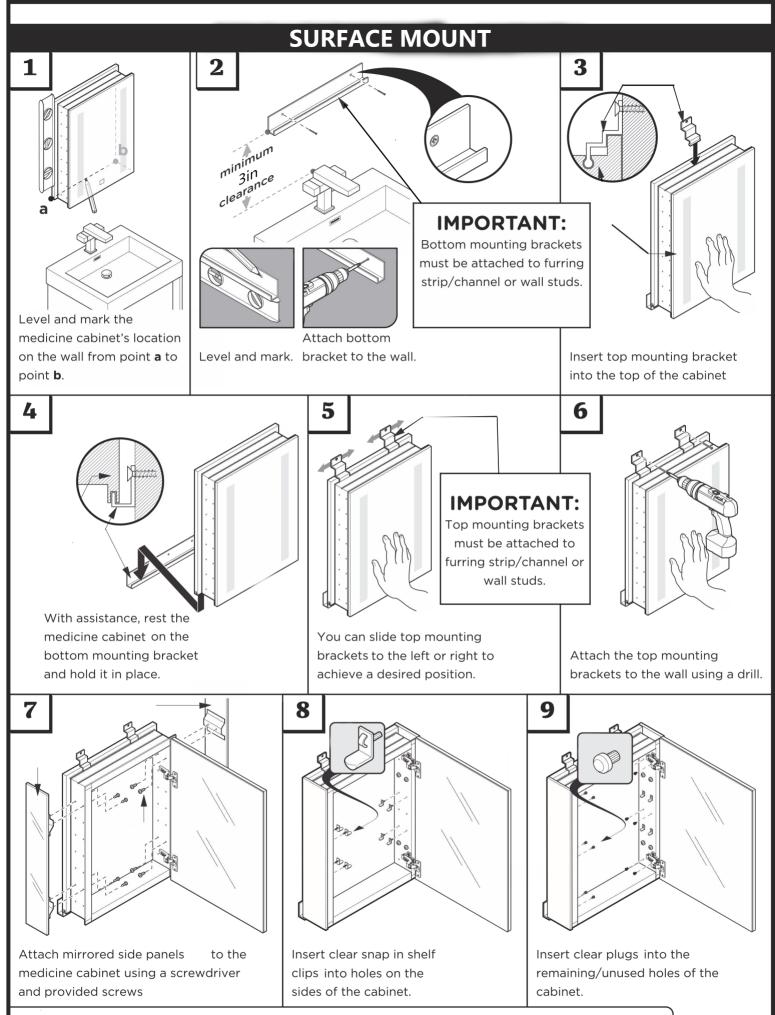



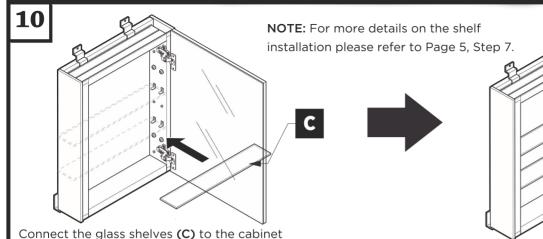

tep 7.


Connect the glass shelves **(C)** to the cabinet by pushing the side of the shelf in the left or right clip and snapping the shelf down.

MOUNT BRACKET

1

Slide top brackets into channel at the top of the cabinet.


2



Make sure top brackets are locked in the grooves.

3


5



IMPORTANT:


Top mounting brackets must be attached to furring strip/channel or wall studs.

4



IMPORTANT:


Make sure cabinet is leveled and fully inserted into the grove of the bottom bracket.



Test the fit of the cabinet before Final assembly.


provide enough wire to make the proper and safe connection to the Field/Power (see Page 5 for electrical connection instructions).



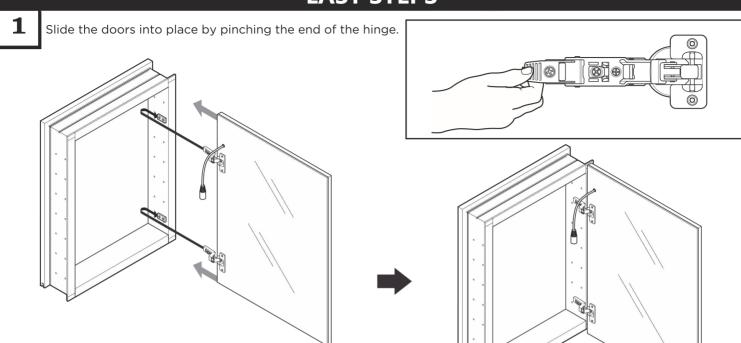


Plug the door into the cabinet.


3a. Insert clear snap in shelf clips (F) into holes on the sides of the cabinet (A).



3b. Push the side of the shelf **(C)** in the left or right clip and snap the shelf **(C)** down.



3C. Insert clear plugs **(H)** into the remaining or unused holes, then cover screw heads with the screw cups **(G)**.



FINAL ASSEMBLY

3D Lighting and Dimmer Switch

Touch the Light button in order to turn the lighting mechanism on.

Touch the light button again in order to chose the desired light.(cool,warm,mixed)

Touch and Hold the button in order to dim the currently selected light.

How to Customize the Digital Clock

Facing the mirror place your figer on the on/off button.

Press and hold the button to engage the clock's program mode:

In program mode, the clock will go through 4 number fields with a 3 second break inbetween. To set the time, press the button again while the number is flashing.